

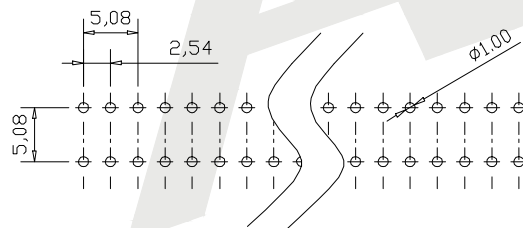



HSF

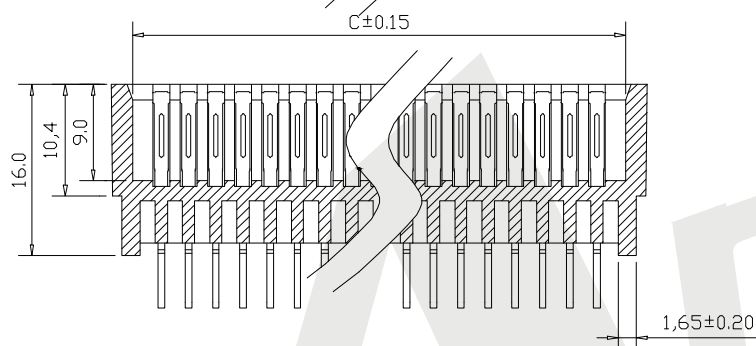


ROHS

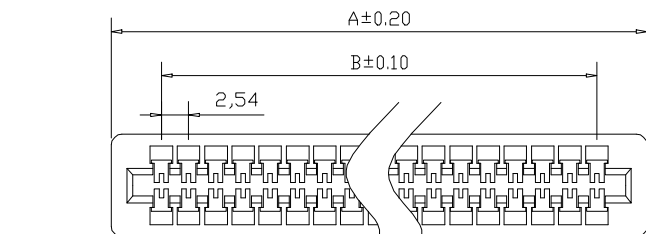

Recommended P.C.B. Layout



Recommended CARD Layout



SPECIFICATION

1. CURRENT RATING:3AMP
2. DIELECTRIC WITHSTANDING VOLTAGE:1000V AC RMS 60Hz. 1MIN
3. CONTACT RESISTANCE:20 MILLIOHMS MAX
4. INSULATION RESISTANCE:5000 MEGOHMS MIN. At 500V DC
5. OPERATION TEMPERATURE:-55° C TO +105° C
6. INSERTION FORCE:0. 4Kgf MAX. Per Pair

Insulator:PBT+G.F. (UL94V-0)

CONTACT:BRASS OF PHOSPHOR BRONZE GOLD PLATED ON CONTACT AREA

TIN PLATED ON SOLDER TAILS, OVER NICKEL

Order code:

ECCR - X - B - 3.8 - S0 - X - B - 04
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① SERIES NO:ECCS

② Number of Pins:X
FOR Example:100=100P

③ Pitch:B:2.54MM

④ DIP Length:X
3.8=3.8MM

⑤ Contact Plating

G0:Gold flash

S0: Gold flash/Ni

G1: 3U" Gold

G2: 5U" Gold

G3:10U" Gold

G4:15U" Gold

G5:30U" Gold

SN:Tin

⑥ Plastic Materials:

P:PBT

L:LCP

⑦ Packing

A:Tray

B:Bag

T:Tube

U:Tube+CAP

R:Tape&Reel

W:Tape&Reel+CAP


⑧ Product NO.:04

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW Wu Feng Rong DATE 11/10/2020

CHECK BobYang DATE 11/10/2020



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO.,LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

2.54mm Slot Right Angle DIP Connectors

DRAWING NO:

ECCR-XB3.8S0XB04

PRODUCT NO:

ECCR-XB3.8S0XB04

Revise dip length from 3.4mm to 3.8mm

2021. 12. 06

REV

DESCRIPTION

DATE