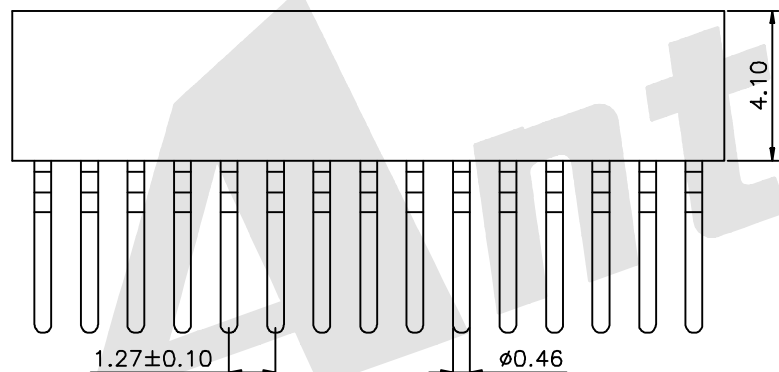
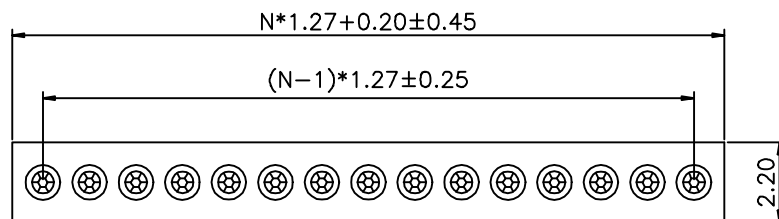


PCB LAYOUT

TECHNICAL DATA

Material:
Pin:brass,machined CuZn38pb2
Plating:
Tin plated :2um/80u"Ni,5um/200u"Sn
Gold plated:2um/80u"full gold
Insulator black:PA46(UL94V-0)
Electrical:
Current rating:1Amps/contact max
Contact resistance:≤4mΩ/contact
Insulation resistance:≥1000MΩ at V=500V
Dielectric withstanding voltage:1000V AC min
Operaing voltage :60VAC/DC
MECHANICAL:
Operaing temperatures:gold plated :-55℃~+125℃
Tin plated:-40℃~+105℃
Soldering temperature:+260℃,10s max

Ordering Code:

MFHCM - X - X - X - X - 01

① ② ③ ④ ⑤ ⑥

- | | |
|---|---|
| ① MFHCM series | ④ Clip Plated |
| ② Contact NO:
XX=XXpin
For example:
06-06pin | 0; No
1; Tin 150 μ"
2; Tin 200 μ"
3; G/F
4; Gold 3 μ"
5; Gold 10 μ"
6; Gold 15 μ"
S; Special |
| ③ Pin Plated | ⑤ Packing |
| 0; No
1; Tin 150 μ"
2; Tin 200 μ"
3; G/F
4; Gold 3 μ"
5; Gold 10 μ"
6; Gold 15 μ"
S; Special | A:Tray B:Bag
C:Tube D:Tape Reel |
| | ⑥ Series number |
| | 01 |

Unless Otherwise specified tolerance
X±0.35 X.XX±0.20
X.X±0.25 X.XXX±0.15

SCALE: As Shown UNIT: mm
DRAW: Wu Sai DATE: 22/03/2018
CHECK: Bob Yang DATE: 22/03/2018



 ANTENK ELECTRONICS
http://www.antenk.com
E-mail:sales@antenk.com

TITLE: Pitch 1.27mm sip socket single row
SMT Pin length 8.80mm

DRAWING NO: MFHCM-XXXX01

PRODUCT NO: MFHCM-XXXX01

REV DESCRIPTION

DATE

1 2 3 4 5 6 7 8