


HSF

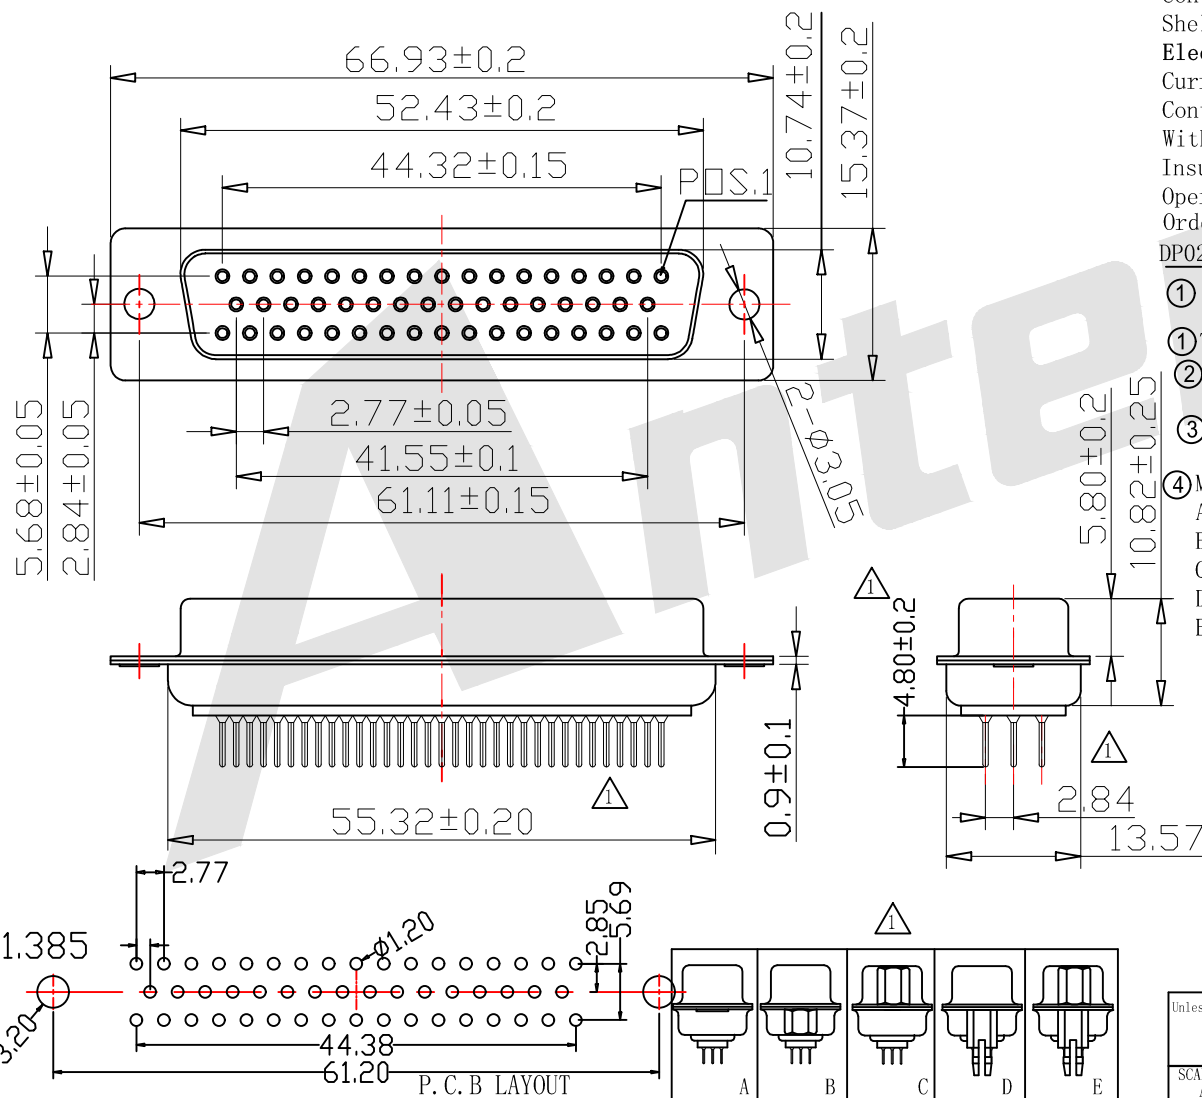

ROHS

**Material:**

Housing: Temperature Thermoplastics, PBT+G.F UL 94V-0

Contact: Brass or Bronze

Shell: 0.35T Steel Nickel Plating All Area

Electical Characteristics:

Current Rating: 5A

Contact Resistance: 20 milliohms Max

Withstanding Voltage: 500V AC For 1 Minute

Insulation Resistance: 1000 Megohms Min

Operating Temperature: -55°C to $+105^{\circ}\text{C}$

Ordering Code:

DP02 - F - 50 - A - 0 - B - S

①	②	③	④	⑤	⑥	⑦
---	---	---	---	---	---	---

① Three Row Straight DIP (Pitch: 2.77mm)

② Contact Type:

F: Female

③ Contact NO.:

50=50pin

④ Mounting Option:

A: No accessories

B: Rear Rivet

C: Front Rivet

D: Groundstand-off on real shell

E: Front rivet+Groundstand-off on real shell

⑤ Accessories:

0: Non Accessories

A: Zinc alloy 4.8mm Nickel

A1: Zinc alloy 5.8mm Nickel

B: Iron 4.8mm Nickel

B1: Iron 5.8mm Nickel

C: Copper alloy 4.8mm Nickel

C1: Copper alloy 5.8mm Nickel

D: Copper screw 4.8mm Nickel

D1: Copper screw 5.8mm Nickel

⑥ Color Code:

W: White L: Blue

B: Black G: Grey

⑦ Contact Plating

S: Selective Gold

S1: Selective 3u" Gold

S2: Selective 5u" Gold

S3: Selective 10u" Gold

S4: Selective 15u" Gold

S5: Selective 30u" Gold

G0: Gold flash

G1: 3u" Gold over

G2: 5u" Gold over

G3: 10u" Gold over

G4: 15u" Gold over

G5: 30u" Gold over

Unless Otherwise specified tolerance

X. ± 0.35 X. XX: ± 0.20 X. X: ± 0.25 X. XXX: ± 0.15

SCALE:

UNIT:

As Shown

mm

DRAW

DATE

Wu Sai

22/03/2018

CHECK

DATE

BobYang

22/03/2018



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail: sales@antenk.com

TITLE:

D-SUB PCB Female Three Row 50

Pin (Pitch: 2.77mm) Straight (stamped Pin)

DRAWING NO:

DP02-F50A0BS

PRODUCT NO:

DP02-F50A0BS

Change the shape and size

16/03/2022

REV

DESCRIPTION

DATE



3rd ANGLE PROJECTION