
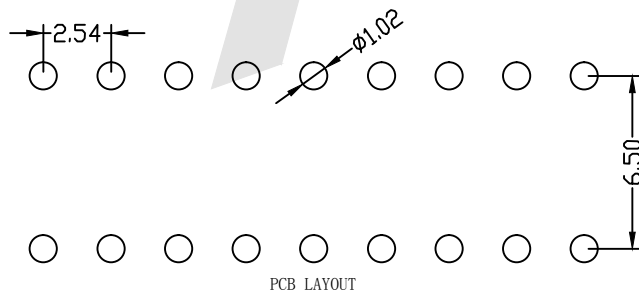
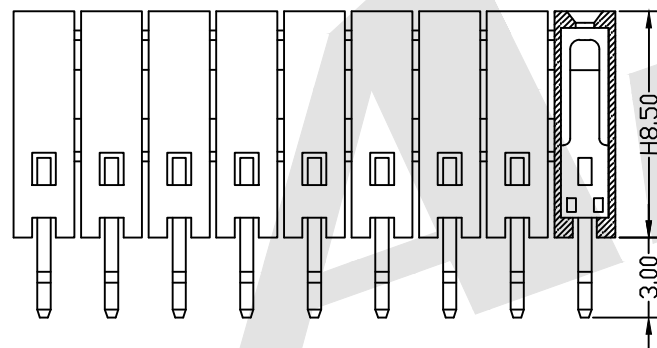


HSF

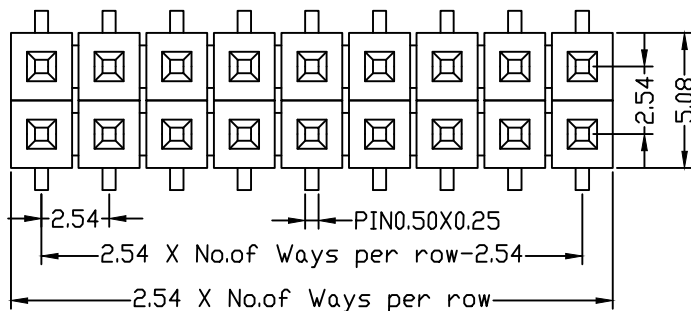

DIM:	Type1	Type2	Type3
A	7.62	6.50	5.70

SPECIFICATION

Current Rating:	3.0 Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PBT,UL 94V-0 Black


Ordering Code:

FHEU07 - X - X - D - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts
02 To 80
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Connector Type
D: Dual
- ⑤ Plastic High:
H:8.5
Please mark the desired length in the H
- ⑥ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T
- ⑦ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
- ⑧ Special Function
A:Type 1
B:Type 2
C:Type 3

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown
UNIT:
mm
DRAW
YG ZHONG
DATE
01/05/2016
CHECK
BobYang
DATE
01/05/2016



Antenk ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE:
2.54mm Female Header Dual Row Bottom Entry Type H:8.5

DRAWING NO: FHEU07-XXDXXX

PRODUCT NO: FHEU07-XXDXXX

REV	DESCRIPTION	DATE